


# ABC DRY CHEMICAL

**ABC** or **MULTI-PURPOSE** extinguishers utilize a specially fluidized and siliconized mono ammonium phosphate dry chemical. It chemically insulates Class A fires by melting at approximately 350°F and coats surface to which it is applied. It smothers and breaks the chain reaction of Class B fires and will not conduct electricity back to the operator.

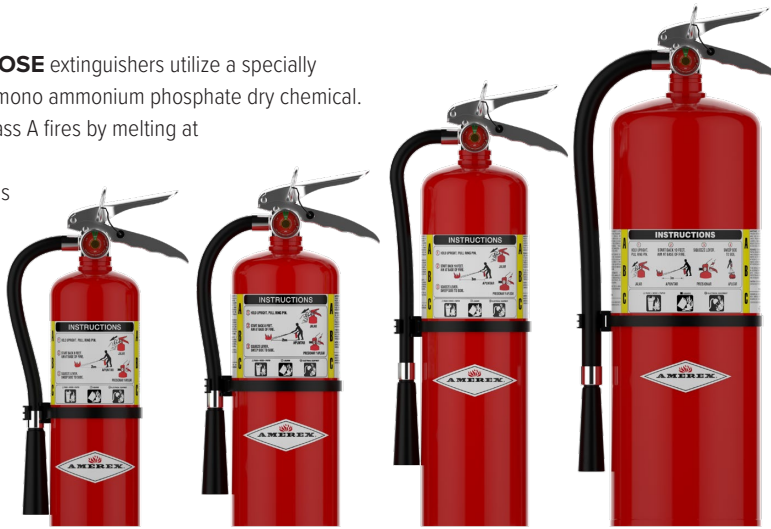

B424

B461

B441

423

**BRASS VALVE**

## RUGGED

- 6-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction

### BRASS VALVE—HEAVY DUTY

- Chrome-Plated Brass Valve Body
- Stainless-Steel Handle & Lever

### ALUMINUM VALVE—LIGHT TO MEDIUM DUTY

- Anodized Aluminum Valve Body
- Anodized Aluminum Handle & Lever

- Temperature Range -65°F to 120°F

## USER FRIENDLY

- Easy and Economical to Maintain and Service
- QR Coded and Multilingual Labels

## OPTION

- USCG Approved with Bracket Listed on UL Label
- Chrome Cylinders (See Chart Below)



B417/T

B500/T

B402/T

B443

B456

A411

**ALUMINUM VALVE**

### AVAILABLE IN WHEELED EXTINGUISHERS



MANUFACTURED AND TESTED TO UL STANDARDS  
COMPLIES WITH NFPA 10 STANDARD  
ISO-9001/ISO-14001 CERTIFIED UL LISTED

CONFORMS TO TEST STANDARDS:  
CAN/ULC-S504 - UL 299 &  
CAN/ULC-S508 - UL 711

**LARGEST SELECTION OF SIZE AND EXTINGUISHER OPTIONS AVAILABLE.**

AGENT TYPE	ABC DRY CHEMICAL									
	Anodized Aluminum						Chrome Plated Brass			
VALVE TYPE	Nozzle			Hose & Nozzle				Hose & Nozzle		
DESIGN	Nozzle			Hose & Nozzle				Hose & Nozzle		
MODEL NUMBER	B417T	B500/B500T	B402/B402T	B443	B456	A411	B424	B461	B441	423
UL & ULC RATING	1A:10B:C	2A:10B:C	3A:40B:C	3A:40B:C	4A:80B:C	10A:120B:C	2A:10B:C	3A:40B:C	4A:80B:C	10A:120B:C
CAPACITY (LBS.)	2.5	5	5	6	10	20	5	6	10	20
SHIPPING WT. (LBS.)	5.25/5.5	9.25/9.5	9.25/9.5	12.75	18	36.5	10.5	14	19.5	38
HEIGHT (IN.)	15.25	15.25	15.25	16	20	24	15.5	16.25	20.5	24
WIDTH (IN.)	5.5	7.25	7.25	7.75	7.75	10.25	8	8.5	8.75	10.25
DEPTH (IN.)	3	4.25	4.25	5	5	7	4.25	5	5	7
RANGE (INITIAL- FT.)	9-15	12-18	12-18	15-21	15-21	15-21	12-18	15-21	15-21	15-21
DISCHARGE TIME (SEC.)	9	14	14	14.5	22	30	14	14	22	30
OPTIONAL CHROME CYLINDER	Yes	Yes	Yes		Yes			Yes	Yes	
NOMINAL OPERATING PRESSURE	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG
INCLUDED BRACKET	Vehicle	Wall/Vehicle		Wall			Wall			

